




Bute Energy
Aberedw Energy Park

Appendix 2.7: **Aviation Lighting and Mitigation Report**



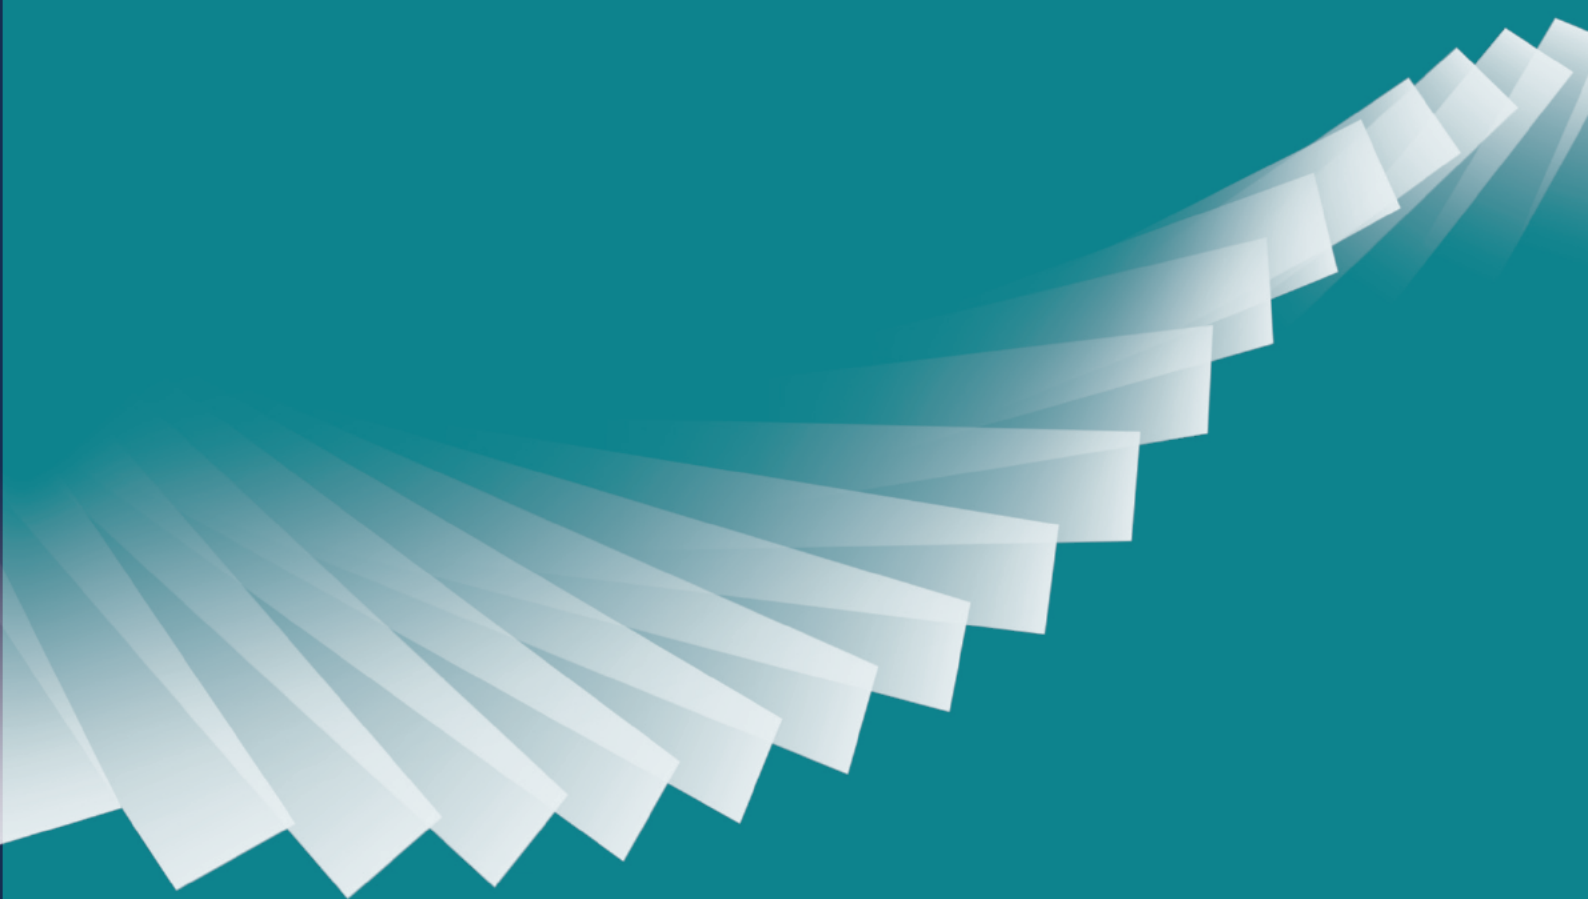

Wind Power Aviation Consultants Ltd

Aberedw Energy Park Aviation Lighting and Mitigation Technical Appendix V3.0

Our Reference: WPAC 024/25

Your Reference: Aberedw EIA

Authors: Commander John Taylor, RN (Ret)

Squadron Leader Mike Hale MBE MSc CFS RAF (Ret)

Light Modelling, GIS and Mapping – Sam Taylor BA (Hons) MSc

Wind Power Aviation Consultants Ltd, Company No.: 6811887
e-mail: enquiries@wpac.co.uk Tel.: +44 (0)2380767345 Mob.: +44 (0)7949234440
www.wpac.co.uk

The information contained within this document (including all graphs, maps, tables, images and photographs) is, and remains, the copyright of Wind Power Aviation Consultants Ltd ©2025, and may not be reproduced by any means, without the explicit written permission of Wind Power Aviation Consultants Ltd.

Reference Documents

- A. Civil Aviation Publication (CAP) 764 Civil Aviation Authority (CAA) Policy and Guidance on Wind Turbines Version 6, Feb 2016
- B. CAP 764 Version 7 (Draft) issued for comment in June 2020
- C. CAP 764 Version 7 (Draft) issued for comment in April 2024
- D. Air Navigation Order (ANO) Article 222
- E. CAA Policy Statement: Lighting of Onshore Wind Turbine Generators in the United Kingdom with a maximum blade tip height at or in excess of 150m Above Ground Level dated 01/06/17
- F. International Civil Aviation Organisation (ICAO) Annex 14 Vol 1 Chapter 6
- G. MOD Obstruction Lighting Guidance Document 01 Jan 2020
- H. Landscape Institute Guidance on Landscape and Visual Impact Assessment Version 3

Scope

1. This report is divided into two parts. Part 1 proposes a lighting design that is compliant with existing and draft (but soon to be ratified) regulations and guidance contained within References A to G as discussed with the CAA and the MOD. It explains the rationale behind the lighting design taking into account the requirement to minimise the number of turbines illuminated with aviation obstruction lights whilst maintaining flight safety and provides a detailed assessment of the brilliance of the lighting when viewed from a number of viewpoints provided by the LVIA consultant after consultation with the relevant stakeholders including the Local Planning Authority. Part 2 of the report identifies and explains those mitigation measures that can be utilised to minimise the environmental effect of the lights including an assessment of the historical meteorological data from which to predict the luminous intensity requirements for the lights. The entire report can be considered to fulfil the requirements for an Aviation Lighting Landscape and Visual Impact Mitigation Plan and can be used to inform the Landscape and Visual Impact Assessment as recommended in the guidance laid down in the Landscape Institutes Guidelines for Visual Impact Assessment Version 3 (GLVIA3).

Part 1 Turbine Lighting Layout Design

Introduction

2. WPAC have designed a large number of CAA and MOD compliant lighting layouts for wind farms and are also in constant dialogue with the CAA regarding the proposed changes to CAP 764 in terms of aviation lighting requirements. Whilst Reference A is technically the current publication for policy and guidance on this issue, Reference B was released for comment and is already being used by the CAA as the current de facto policy. Reference C is also currently out for consultation with all aviation stakeholders but the proposed release date has passed and the CAA have yet to publish a new release date. Discussions with the CAA have clarified that the draft regulations at Reference B will not be changing in terms of the overarching policy but the wording may be slightly amended in the interests of clarity.



Lighting Layout Starting Point and Assumptions

3. The Applicant is proposing an 18-turbine energy park in Mid Wales located 3km to the east of Builth Wells. The site is centred on Aberedw Hill with the River Wye located to the west. This location is within MOD Low Flying Area (LFA) 7 but fortunately not within the more important Tactical Training Area (TTA) 7 and a comfortable 7 km from the Sennybridge Range. At night this area converts to Night Allocated Region (NAR) 5CN, an area primarily reserved for fast jet low flying in the hours of darkness but is also regularly used by Army and RAF helicopters.

4. Conversely, the hilly and built-up nature of this part of Mid-Wales dictates that this is not an active civilian/commercial area for fixed-wing aircraft in the lower airspace at night. However, much of Wales is an active helicopter operating region. Emergency Helicopters operating in the area at night will include: Police, Helicopter Emergency Medical Services (HEMS), Ambulance, Coast Guard and various military formations down to ground level on occasion. Due to the possibility of MOD and civilian helicopters operating in the immediate airspace around the Proposed Development, the site will require a comprehensive obstruction lighting arrangement that includes both visible and infra-red obstruction lights to meet CAA and MOD criteria.

Lighting Assessment Overview

- From a CAA perspective Aberedw is sited outside controlled airspace and away from airports and airfields. As a result it will be assessed against visible lighting in accordance with Class G ‘en-route’ airspace requirements as detailed in CAP 764 (latest draft).
- To accommodate MOD requirements, the site will be assessed for Night Vision Goggle (NVG) compatible lighting in accordance with MOD published obstruction lighting specifications.
- Where possible the recommended final lighting configuration will be optimised to reduce light impact on the local area.
- CAA obstruction lighting dispensations that are currently offered where flight safety can be maintained will be included.
- The Aberedw Proposed Development is for 18 turbines at 200m to tip.



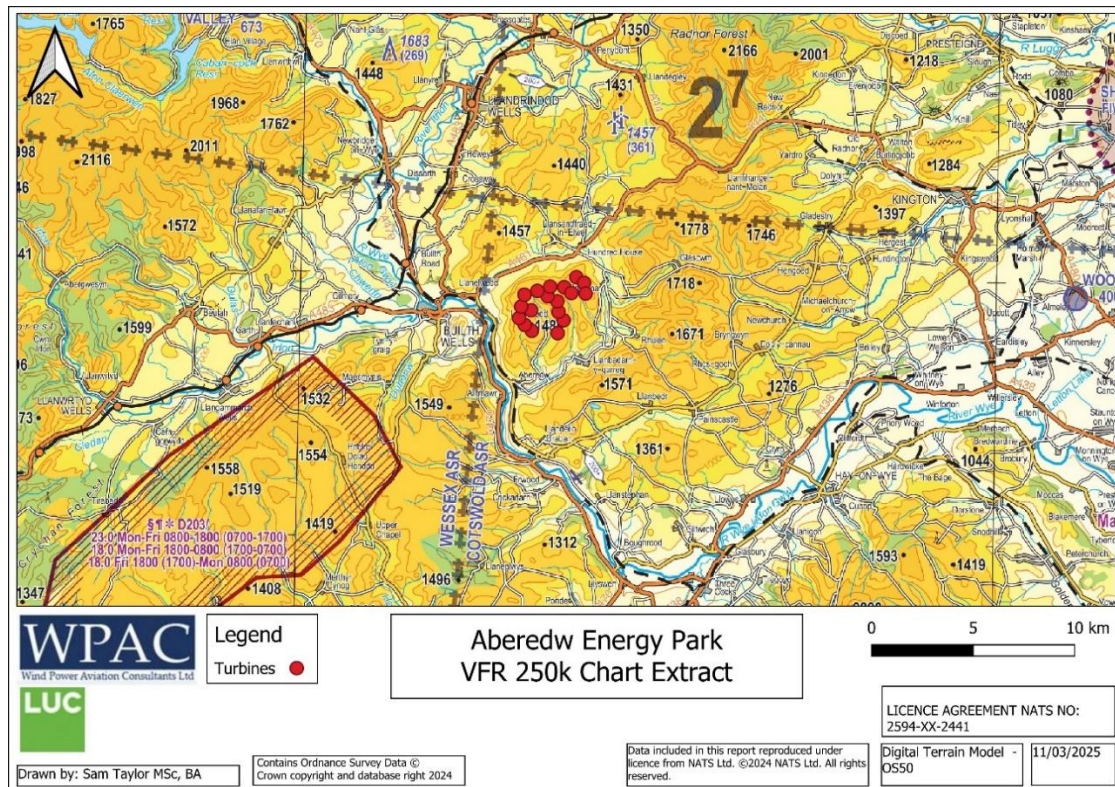


Figure 1 Aberedw on an aviation chart

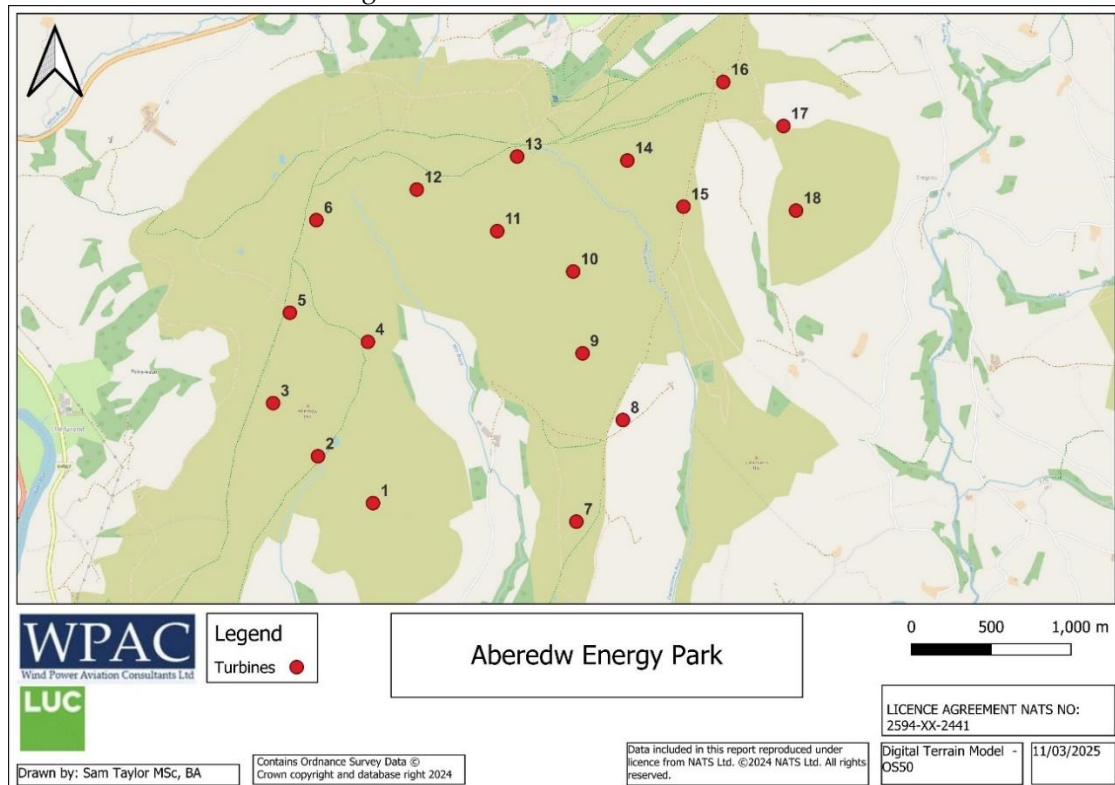


Figure 2 Aberedw Energy Park

CAA-ANO Red 2000/200cd Lighting (In compliance with CAA CAP 764 - Draft)

5. In accordance with the CAP 764 (draft) conditions, the CAA requires:
- That all perimeter turbines be lit unless removing a light will leave a gap of less than 900m total between the remaining lit turbines.
 - That any turbine within 200m of a 'string perimeter' be lit unless the distance between adjacent turbines is less than 900m total.
 - Note: additional spacing dispensation is sometimes available for the above criteria.
 - That any unlit turbine does not exceed a 10° up-slope from adjacent lit turbines.
 - No turbine shall be more than 1800m (1nm) from a lit turbine.
6. Applying these criteria dictates that 12 turbines of the Aberedw site would require ANO visible red lighting.

Turbines with 2000/200cd Lights: T1, T2, T3, T5, T6, T7, T8, T12, T13, T16, T17 and T18

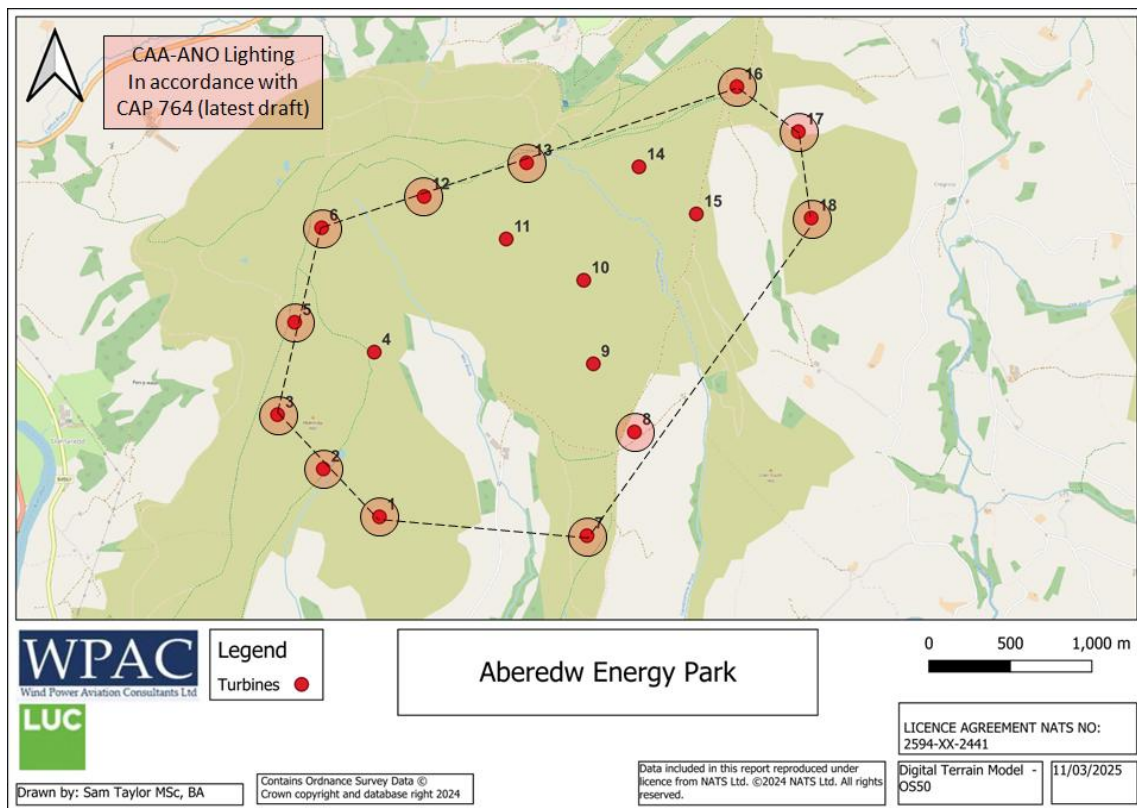


Figure 3 Lighting Layout without CAA Dispensations

CAA-ANO Red 2000/200cd Reduced Lighting Proposal

7. The military have operated at low level at night for many decades now using night vision equipment. In more recent times, the last decade or so, more civilian operators have moved to night low level using suitable night vision equipment: night vision goggles (NVGs) etc. Such civilian operators include Coast Guard (CSAR), Police, Helicopter Emergency Medical Services (HEMS) and Air Ambulance.

8. Although, in the past, some night operators would fly at night at low level without night equipment (on carefully pre-planned exercises pre-flown by day) such events have been overtaken by the ever-widening use of night vision equipment. As a result, operators who now night fly, without night vision equipment, will fly at or above 'safety altitude' when not under the guidance of Air Traffic Control.

9. Aircraft operating at safety altitude or above and depending upon the protocol adopted or phase of flight, the safety altitude used will be 1000ft (300m), 1500ft (450m) or 2000ft (600m) above the local terrain/highest obstacle, this includes the turbine tip heights. Aircraft/helicopters flying as such, will only need enough visible lights to define the wind farm and its size/shape/perimeter.

10. Accordingly, aircraft flying above the Aberedw turbines, at safety altitude or above, and/or under ATC control, will only require an outline of the Aberedw site. Such a requirement could be met with **six** visible red lights on turbines **T2, T6, T7, T10, T16 and T18**.

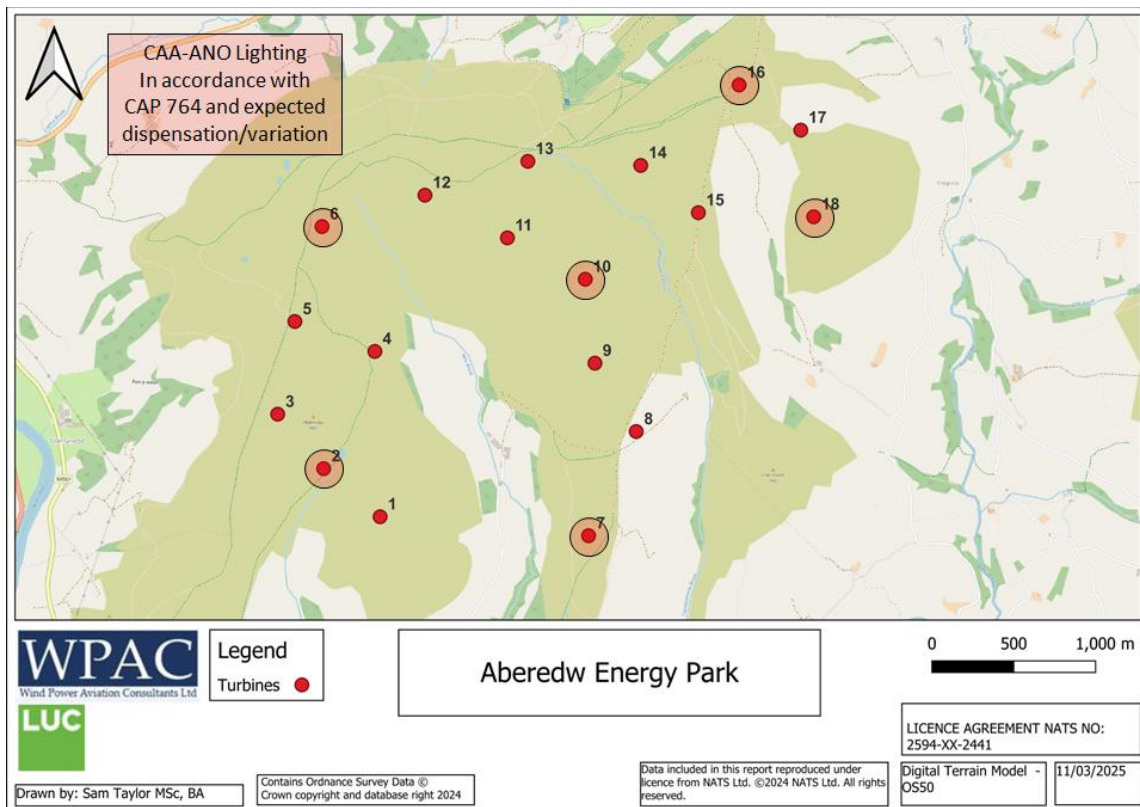


Figure 4 CAA-ANO Lighting Arrangement (including CAA dispensations).

MOD Lighting Requirements

11. Early detection is important especially if the aircraft is manoeuvring hard and the air temperature profile causes the turbines to blend into the background. Suitable lighting is necessary for flight safety.

12. MOD IR lights have been developed to be invisible to the public at large but very detectable to aircrew night vision aids. As such the MOD IR lights can have a wide beam width and flash continuously without disturbing the visible environment.

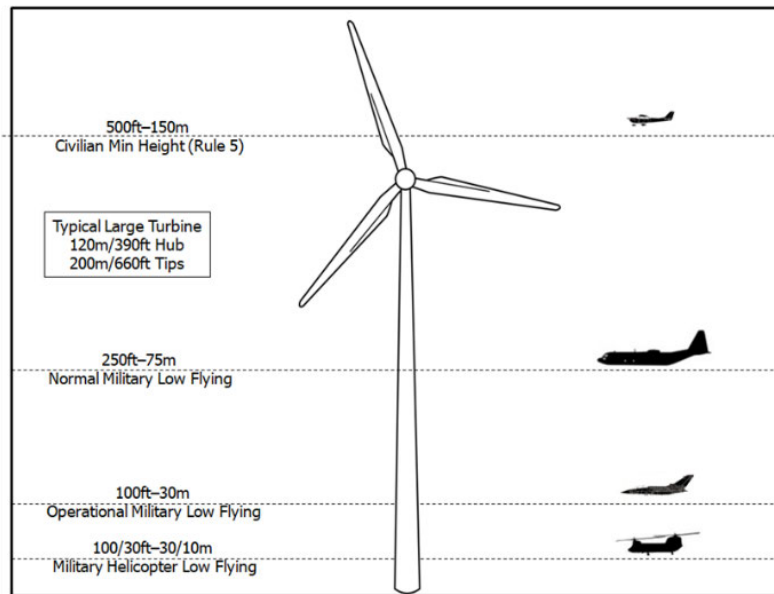


Figure 5 Wind turbine in context with MOD Low Flying

MOD Infra-Red Lighting Layout

13. The MOD requires:

- That all 'compound-perimeter' turbines (see blue dotted line) be lit unless removing a light will leave a gap of less than 500m between the remaining perimeter lit turbines. Note: At this site, the CAA string and MOD compound perimeters are notably different.
- That any dominant turbine, by location or height, be lit. Note: here, all turbines are lit.
- Aberedw does not meet the MOD small site criteria (red dotted circle). Accordingly, central (non-perimeter) turbines will require lighting (T4 and T11).

14. Applying these criteria dictates that all 18 turbines of the Aberedw site will require IR lighting.

Turbines with IR Lighting: T1, T2, T3, T4, T5, T6, T7, T8, T9, T10, T11, T12, T13, T14, T15, T16, T17 and T18

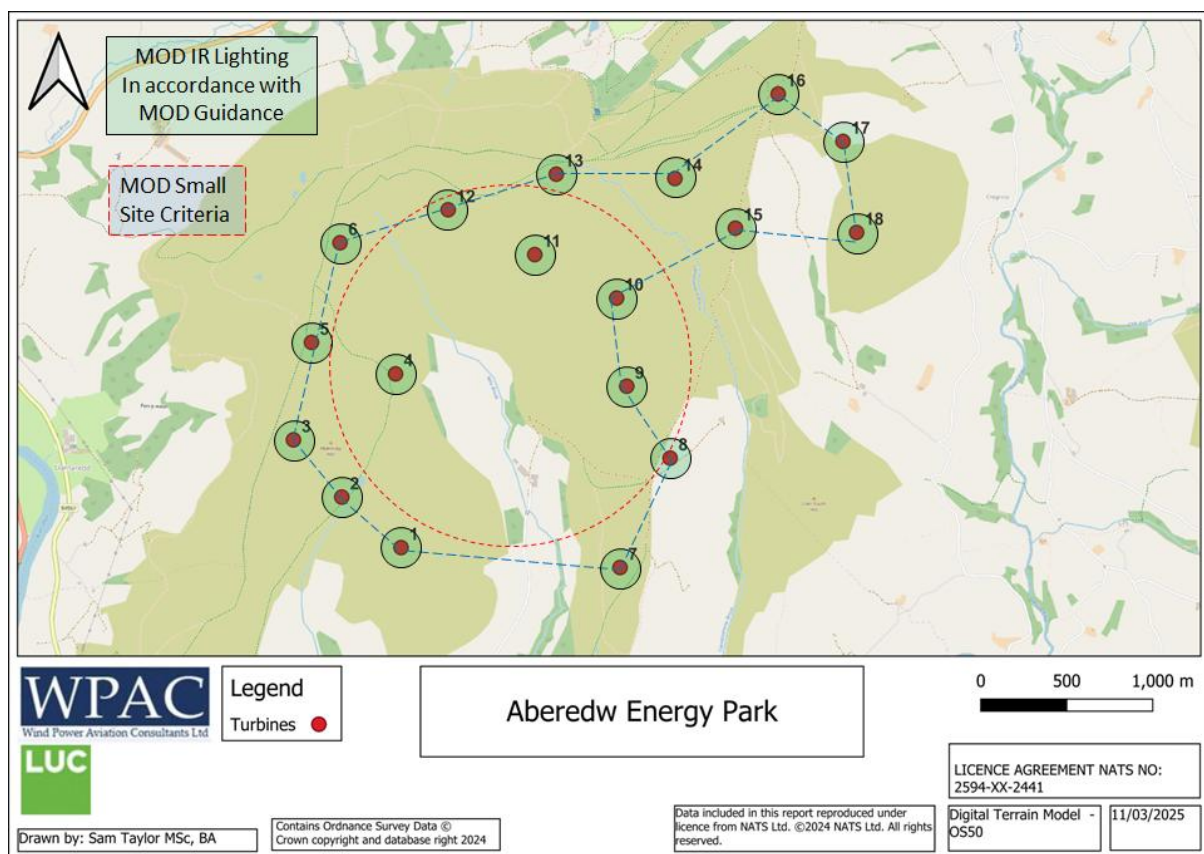


Figure 6 Proposed MOD Infra-Red Lighting Arrangement

Combined CAA Visible Lighting and MOD Infra-Red Lighting

Turbine	Easting	Northing	Tip-Ht	Hub-Ht	CAA-ANO	MOD-I/R
T1	308846	250156	200	125.45		600mW/sr
T2	308501	250450	200	125.45	2000/200cd	600mW/sr
T3	308220	250783	200	125.45		600mW/sr
T4	308814	251167	200	125.45		600mW/sr
T5	308325	251350	200	125.45		600mW/sr
T6	308491	251930	200	125.45	2000/200cd	600mW/sr
T7	310120	250040	200	125.45	2000/200cd	600mW/sr
T8	310411	250677	200	125.45		600mW/sr
T9	310159	251095	200	125.45		600mW/sr
T10	310100	251608	200	125.45	2000/200cd	600mW/sr
T11	309624	251861	200	125.45		600mW/sr
T12	309120	252122	200	125.45		600mW/sr
T13	309749	252329	200	125.45		600mW/sr
T14	310439	252304	200	125.45		600mW/sr
T15	310791	252015	200	125.45		600mW/sr
T16	311040	252796	200	125.45	2000/200cd	600mW/sr
T17	311417	252520	200	125.45		600mW/sr
T18	311496	251990	200	125.45	2000/200cd	600mW/sr

Table 1 CAA and MOD Lighting Arrangement

ICAO Annex 14 Table 6-3 (excerpt)

Benchmark intensity	Minimum requirements					Recommendations				
	Vertical elevation angle (b)			Vertical beam spread (c)		Vertical elevation angle (b)			Vertical beam spread (c)	
	0°		-1°			0°	-1°	-10°		
	Minimum average intensity (a)	Minimum intensity (a)	Minimum intensity (a)	Minimum beam spread	Intensity (a)	Maximum intensity (a)	Maximum intensity (a)	Maximum intensity (a)	Maximum beam spread	Intensity (a)
2000	2000	1500	750	3°	750	2500	1125	75	N/A	N/A

a) 360° horizontal. All intensities are expressed in Candela. For flashing lights, the intensity is read into effective intensity, as determined in accordance with the Aerodrome Design Manual (Doc 9157), Part 4.

b) Elevation vertical angles are referenced to the horizontal when the light unit is levelled.

c) Beam spread is defined as the angle between the horizontal plane and the directions for which the intensity exceeds that mentioned in the "intensity" column.

Table 2 ICAO Annex 14 Table 6-3 Medium Intensity Lighting Specifications.

18. **Low Intensity Mid Mast Lights** – Mid mast lighting was originally intended to give an attitude/range reference (horizon indication) to pilots flying at night in the days before NVGs. Hub and mid mast lights will give a vertical reference (from which a horizontal reference can be gauged) when fitted to a single vertical structure. In contrast, a single light will not be able to give a vertical or horizontal reference or indication of range and range-rate. However, a series of single hub lights, on a group of structures, will provide a good horizon reference together with range and range-rate clues. Accordingly, the requirement for mid-masts lights is much diminished if not made redundant in the case of multiple vertical structures such as wind farms.

19. All of the current commercially available 32cd (supposedly focused) lights are over-engineered (up to 70cd between -30deg and +40deg to fit a multitude of aviation and marine applications) they induce a disproportionately large environmental impact, often significantly more than the focused hub 2000/200cd lights. WPAC proposed to the CAA that the guidance requirement for 32cd (Type B) mid mast lights be removed for Aberedw. They have agreed that intermediate lighting is not required as reflected in their lighting reduction concession approval letter attached at Appendix C to this report.

Table 6-2. Light distribution for low-intensity obstacle lights

	Minimum intensity (a)	Maximum intensity (a)	Vertical beam spread (f)	
			Minimum beam spread	Intensity
Type A	10 cd (b)	N/A	10°	5 cd
Type B	32 cd (b)	N/A	10°	16 cd
Type C	40 cd (b)	400 cd	12° (d)	20 cd
Type D	200 cd (c)	400 cd	N/A (e)	N/A

Note.— This table does not include recommended horizontal beam spreads. 6.2.1.3 requires 360° coverage around an obstacle. Therefore, the number of lights needed to meet this requirement will depend on the horizontal beam spreads of each light as well as the shape of the obstacle. Thus, with narrower beam spreads, more lights will be required.

Table 3 ICAO Annex 14 Table 6-2 Low Intensity Obstacle Lights.

IR Light Specifications

20. The IR lights will conform to the MOD specification as set out in MOD Lighting Guidance and shown below in Table 4.

MOD Specification IR.

IR wavelength – 750 to 900nm.

But ideally concentrated within 800 to 850nm for optimum detection by all military NVG types.

IR intensity – 600mW/sr minimum at peak flash but not above 1200mW/sr.

(Note: Typically a 300mW/sr steady burn LED IR light will generate 600mW/sr at peak flash)

This will generate a 7-8 nm NVG pick-up range - remaining above 5nm as the light ages.

Horizontal Pattern – unrestricted 360 deg.

Vertical Pattern – Minimum flash intensity of 600 mW/sr between +30 deg and -15 deg elevation.

– up to 50% reduction between +25 to +30 deg and -10 to -15 deg is acceptable.

– Maximum intensity of 1200 mW/sr for all angles of elevation.

– Vertical overspill is acceptable.

Flash Pattern – 60 flashes per min at 100-500 ms duration (ideally 250ms)

Synchronisation – all lights to be visually synchronised across a wind farm site

Table 4 MOD Specification for IR Obstacle Lights

Timings

21. The lights (IR and ANO) will be switched on between Evening Civil Twilight and Morning Civil Twilight in accordance with the UK Almanac; approximately 11 hours per day when averaged over the year.

Assessment of Aviation Lighting and Potential Mitigation Measures Designed into the Lights

22. Having defined a layout of turbines to be fitted with visible lighting, an assessment has been undertaken to calculate the brilliance of the lights when seen from a number of viewpoints. The standard aviation lights to be fitted to the nacelle of the turbines are required to fulfil certain design criteria in terms of brilliance and coverage as per Table 2. They are designated 'medium intensity obstruction lights' and have a **minimum** luminous intensity of 2000 candela¹ at horizontal and slightly above. The LED lights are also required to be able to shine a beam that reduces in intensity above and below the horizontal. One manufacturer of such obstruction lights, CEL, have tested their light, the CEL-WT-MIC² in a calibration chamber and produced results showing precisely how much the beam

¹ Candela is the SI Unit of luminous intensity and refers to the amount of light emitted in a particular direction.

² [CEL-WT-MIC - rev1.pdf](#)

reduces in brilliance at any specified elevation angle. The results are interpolated to every 0.1°. This light is a finely tuned upgrade to the previous version and has been developed specifically for onshore wind turbine lighting in order to minimise downward light intensity and is now available from the manufacturer.

23. Figure 8 demonstrates the reduction in luminous intensity below the horizontal and also above 1° in elevation. The various coloured lines are the candela measured from different angles in the horizontal in order to measure the performance all around the light.

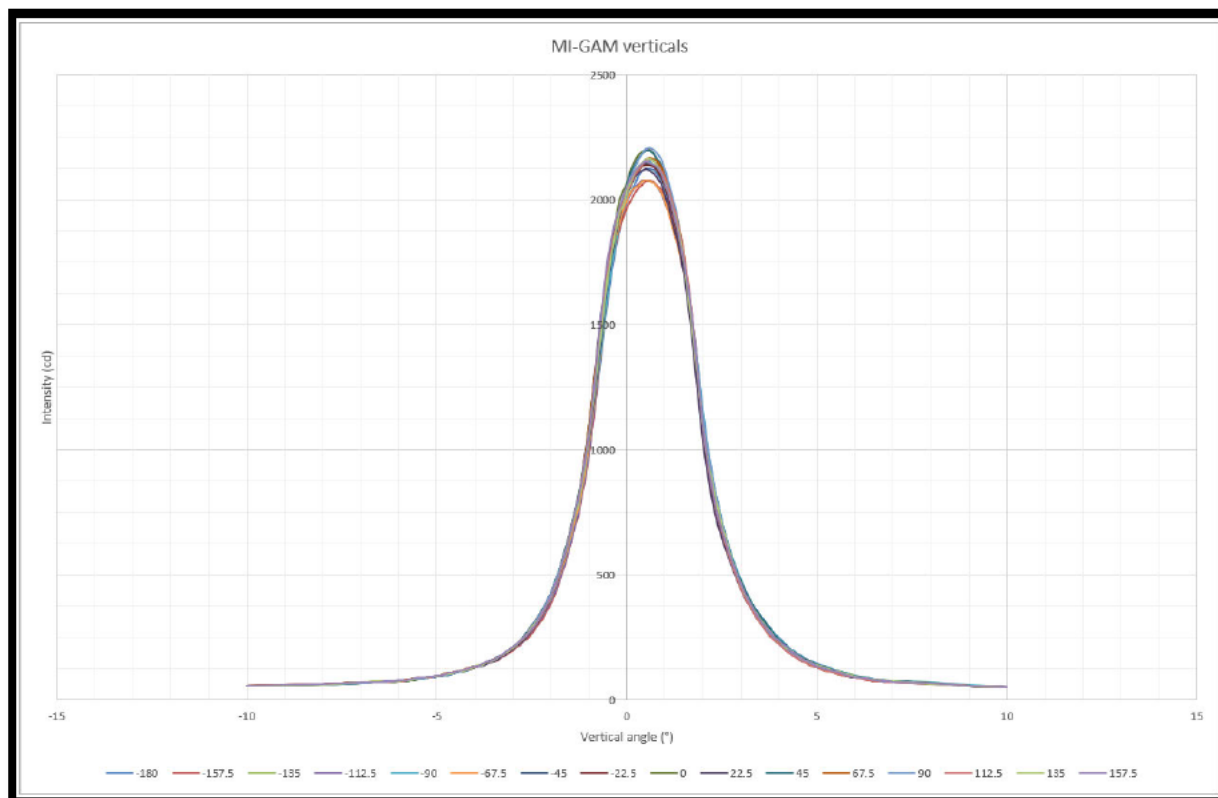


Figure 8 (MI GAM CEL-WT-MIC Light Measurement Results)

24. WPAC have utilised their propagation modelling system (Rview) to calculate the precise angle of elevation between the turbine light and a viewpoint assuming a height of eye of 1.5 metres and a turbine hub height of 125.45 metres. The system utilises a standard atmospheric model and an earth model that uses actual earth curvature between the turbine light and the viewpoint. Ordnance Survey OS50 DTM is used as the terrain model. The calculations have been undertaken for each designated lit turbine against all designated Aberedw Energy Park viewpoints. The locations of the viewpoints are shown in Figure 9 and Table 5.

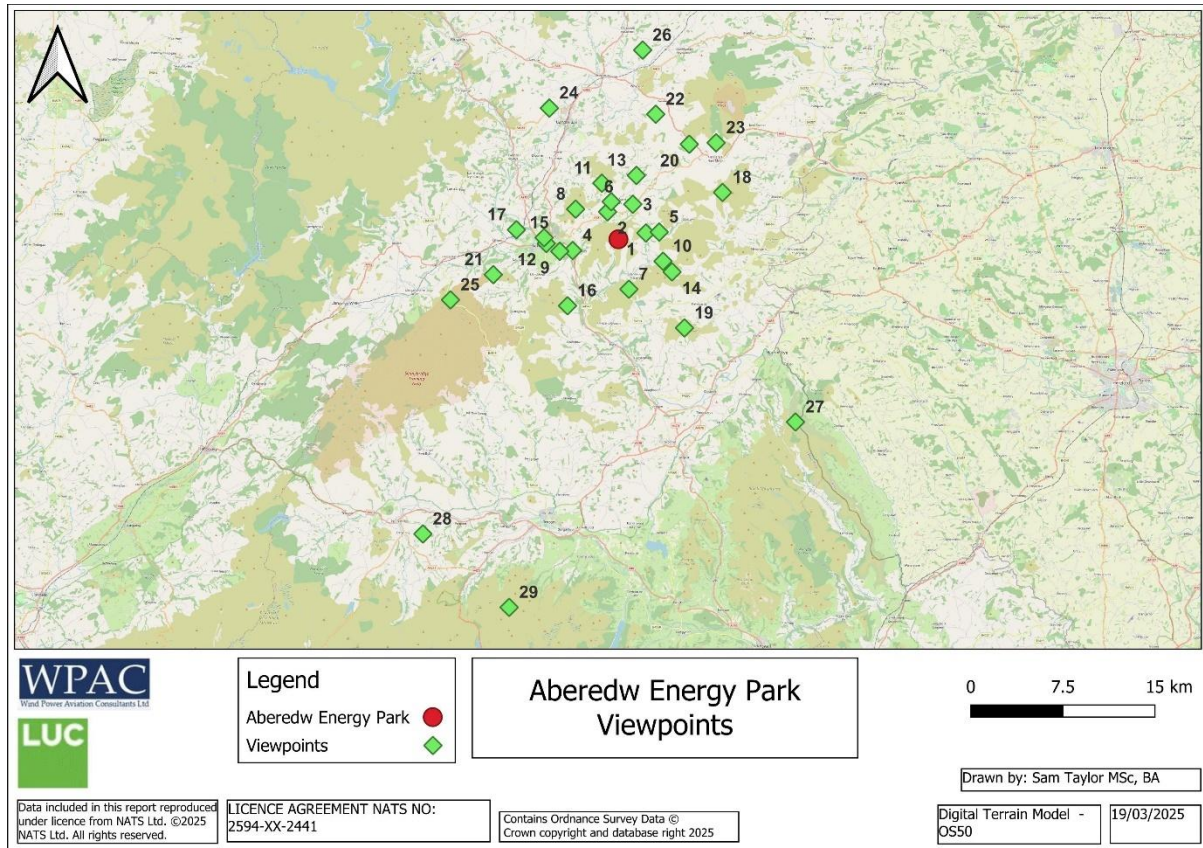


Figure 9 Viewpoint Locations

25. The next stage in the process is to take the candela figures radiated towards a viewpoint and taking into account the distance, calculate the lumens per square metre (also known as Lux) that will be experienced by the human eye at the viewpoint. The figure produced is in micro-lumens per square metre or $\text{lumen}^{(10^{-6})}/\text{m}^2$ or $\text{lux}^{(10^{-6})}$. These are perfect clear-air figures and therefore worst-case results from an LVIA perspective. Figures obtained by this method enable comparisons to be made with commonly understood light sources such as stars or planets. In practice the light intensity at the observation points will be further attenuated by scatter and absorption by airborne dust, droplets and aerosols in the atmosphere. This attenuation is typically in the order of 10 to 20% but can be as high as 75% at the more distant observation ranges.

26. The results for every lit turbine from all of the viewpoints are shown in the results tables in Appendix A to this report. Viewpoints where lights are obstructed by terrain are shaded in green, when the viewpoint is too close to a turbine to get an accurate assessment it is shaded red. **To take into account any limitations within the terrain model we have highlighted in purple any viewpoints where the line of sight is under 10 metres above ground level but above 1.5 metres and should therefore, still be screened by terrain but may be visible within the vicinity of the viewpoint.**

Viewpoint Number	Viewpoint Name	Position
1	St. David's Church, Cregrina	SO 12340 52117
2	A481 at Matts Common	SO 09216 53845
3	A481 at Hundred House	SO 11275 54464
4	A470 at Aberduhonw	SO 06374 50687
5	NCN 825 near Cregrina	SO 13423 52194
6	Perthi Common	SO 09513 54674
7	Twm Tobacco's Grave on Llandeilo Hill	SO 10957 47533
8	Carneddau	SO 06616 54067
9	Garth Hill	SO 05325 50626
10	Rhulen, south east of Aberedw	SO 13734 49815
11	Castle Bank	SO 08755 56184
12	Wye Bridge, Builth Wells	SO 04226 51262
13	Unnamed lane at Bettws	SO 11564 56813
14	Unnamed lane, north-east of Llanbedr Hill	SO 14468 48947
15	Royal Welsh Showground	SO 04043 51736
16	Wye Valley Walk near Banc y Celyn	SO 05955 46184
17	NCN 8 near Cilmerly	SO 01790 52385
18	Llanfihangel Hill	SO 18581 55425
19	The Begwns Roundabout	SO 15480 44374
20	Bridleway off A44 near Castell Crugerydd	SO 15873 59359
21	Heart of Wales Line Trail at Moelfre	SN 99909 48720
22	Llandegley Rocks	SO 13144 61807
23	Open access land on Mynd	SO 18061 59479
24	A4081 at Llanyre	SO 04475 62305
25	Promoted viewpoint south of Cwm Graig-ddu	SN 96419 46664
26	Elan Valley Way near Cwmwrach	SO 12076 67042
27	Hay Bluff, Bannau Brycheiniog National Park	SO 24524 36701
28	Cefn Llechid, Bannau Brycheiniog National Park	SN 94174 27570
29	Pen y Fan, Bannau Brycheiniog National Park	SO 01200 21582

Table 5 Viewpoints

Interpreting the Results

27. The results show that there is a significant decrease in the luminous intensity (candela) of the light emanating towards those viewpoints which are at lower angles of elevation in relation to the turbine hub. However, when considering the perception of the light from a viewpoint in general, the distance between the light and the viewpoint is likely to be the dominant factor and the resultant figure in micro-lux is the most relevant figure to consider. This report provides the results and anticipates that the Landscape and Visual Impact Assessment (LVIA) consultants will be able to put them into the correct context for visualisations in terms of background environmental lighting and atmospheric conditions. Table 6 shows the turbine with the greatest potential perceived luminous intensity expressed in micro-lumens per m² (Lux ^(10⁻⁶)) at each viewpoint.

Viewpoint	Turbine	Distance (KM)	Microlumens per m ² (lux ¹⁰⁻⁶)	Microlumens at 10%	Obscured
1	16	1.47	26.8	2.7	X
2	6	2.05	17.9	1.8	
3	16	1.68	26.5	2.6	
4	2	2.14	16.4	1.6	
5	18	1.94	20.0	2.0	
6	16	2.42	14.8	1.5	
7	7	2.64	111.1	11.1	
8	6	2.84	55.4	5.5	
9	6	3.42	10.4	1.0	
10	7	3.62	9.8	1.0	
11	16	4.09	26.8	2.7	
12	6	4.32	4.8	0.5	
13	16	4.05	8.1	0.8	
14	7	4.48	65.4	6.5	
15	6	4.45	4.7	0.5	
16	7	5.68	32.8	3.3	
17	16	9.26	5.2	0.5	
18	16	7.99	31.8	3.2	
19	18	8.6	17.8	1.8	
20	16	8.15	17.8	1.8	
21	6	9.16	12.6	1.3	
22	16	9.25	19.8	2.0	
23	16	9.69	19.9	2.0	
24	6	11.12	4.7	0.5	
25	2	12.66	10.6	1.1	
26	16	14.28	5.8	0.6	
27	7	19.63	5.5	0.6	
28	7	27.55	2.5	0.3	
29	2	29.78	2.4	0.2	

Table 6 Brightest Turbine Hub Light from each Viewpoint (measured in micro-lumens)

28. In order to place the values in microlumens per m² (lux¹⁰⁻⁶) in context, Table 7 provides some examples of approximate values placed on a number of environmental comparators, however these are just an illustration to place the results in a real world environment. The actual perceived brightness will depend upon a number of factors including bulb manufacturer, bulb type, specific construction (single/multiple colour LEDs etc) atmospheric conditions, absorption spectrum, individual eye characteristics and capabilities.

Wind Power Aviation Consultants Ltd

Aberedw Energy Park Aviation Lighting and Mitigation Technical Appendix V3.0

Our Ref: WPAC/024/25

Date: 23/04/25

Comparison Object	Approximate Illuminance (micro-lumens per m ²)
Car Halogen main beam approaching 1km	Up to 1,000,000 (can vary significantly between cars)
International Space Station (400km up)	1000 (depends upon relative position of sun)
Car Brake Light at 0.5km	400
Car Brake Light at 0.7km	200
Car Brake Light at 1.0km	100
Car Brake Light at 2.0km	25
Car Brake Light at 5.0km	4
Car Brake Light at 10km	1
Front Cycle Light at 0.5km	140 (Modern high power white LED)
Front Cycle Light at 0.7km	70
Front Cycle Light at 1.0km	35
Front Cycle Light at 2km	9
Front Cycle Light at 5km	2
White LED Street Light at 0.5km	500 (Viewed from the horizontal)
White LED Street Light at 0.7km	250
White LED Street Light at 1.0km	120
White LED Street Light at 2.0km	30
White LED Street Light at 5.0km	8
Sodium Street Light at 0.5km	300 (Viewed from the horizontal)
Sodium Street Light at 0.7km	150
Sodium Street Light at 1.0km	75
Sodium Street Light at 2.0km	20
Sodium Street Light at 5.0km	5
Brightest Star in the Sky (Sirius)	13
Airliner flying at 30,000ft)	Nav Lights 0.4 to 5; anti-collision lights 2 to 20
Typical bright star (e.g. Orion)	0.5 to 2.0
Faintest light visible from street lit area	0.4
Visible limit for fully dark-adapted eyes	0.02

Table 7 Comparisons of approximate micro-lumens values



29. If there is a requirement to consider the brightest turbine in terms of emitted candela rather than micro-lumens, Table 8 provides data on which turbine emits the most candela towards each viewpoint but takes no account of the distance between light and viewpoint.

Viewpoint	Turbine	Distance (KM)	Candela	Candela at 10%	Obscured
1	6	3.85	378	38	X
2	6	2.05	75	8	
3	2	4.88	122	12	
4	2	2.14	75	8	
5	7	3.94	176	18	
6	2	4.34	140	14	
7	16	5.26	1314	131	
8	7	5.34	1314	131	
9	10	4.88	196	20	
10	6	5.65	218	22	
11	7	6.29	858	86	
12	6	4.32	89	9	
13	2	7.06	232	23	
14	7	4.48	1314	131	
15	6	4.45	92	9	
16	16	8.34	1314	131	
17	16	9.26	448	45	
18	16	7.99	2028	203	
19	16	9.52	1580	158	
20	7	10.95	1580	158	
21	16	11.85	1451	145	
22	7	12.15	1790	179	
23	16	9.69	1867	187	
24	7	13.5	776	78	
25	7	14.11	1934	193	
26	7	17.11	1451	145	
27	7	19.63	2132	213	
28	7	27.55	1867	187	
29	7	29.82	2142	214	

Table 8 Brightest Turbine Hub Light measured in Candela emitted towards a viewpoint

Wind Power Aviation Consultants Ltd

Aberedw Energy Park Aviation Lighting and Mitigation Technical Appendix V3.0

Our Ref: WPAC/024/25

Date: 23/04/25

Viewpoint	Turbine	Distance (KM)	Microlumens per m2 (lux10 ⁻⁶)	Microlumens at 10%
1	16	1.47	926	92.6
2	6	2.05	476	47.6
3	16	1.68	709	70.9
4	2	2.14	437	43.7
5	18	1.94	531	53.1
6	16	2.42	342	34.2
7	7	2.64	287	28.7
8	6	2.84	248	24.8
9	6	3.42	198	19.8
10	7	3.62	205	20.5
11	16	4.09	120	12.0
12	6	4.32	107	10.7
13	16	4.05	122	12.2
14	7	4.48	111	11.1
15	6	4.45	101	10.1
16	7	5.68	81	8.1
17	16	9.26	44	4.4
18	16	7.99	32	3.2
19	18	8.6	33	3.3
20	16	8.15	30	3.0
21	6	9.16	26	2.6
22	16	9.25	23	2.3
23	16	9.69	21	2.1
24	6	11.12	16	1.6
25	2	12.66	12	1.2
26	16	14.28	10	1.0
27	7	19.63	5	0.5
28	7	27.55	3	0.3
29	2	29.78	2	0.2

Table 8a

30. Table 8a above illustrates the reduction in light intensity over distance. It assumes a theoretical fixed 2000cd/200cd illuminance and tabulates the resultant perceived light intensity for the closest lit turbine to each viewpoint but does not take into account the actual reduction that would be achieved at lower angles of elevation. For example at Viewpoint 2 at a distance of 2.05km the light intensity for a 2000cd light would be 476 lux^{10⁻⁶} whilst the same brilliance of light source viewed from Viewpoint 10 at a distance of 3.62km is 205 lux^{10⁻⁶} and at Viewpoint 28 at a distance of 27.55km it is only 3 lux^{10⁻⁶}.



Part 2 Mitigation

Intensity Reduction (ANO Lighting: 2000cd down to 200cd)

31. The lights (IR and visible red lights) will be switched on between Evening Civil Twilight and Morning Civil Twilight in accordance with the UK Almanac; approximately 11 hours per day averaged over the year.

32. The primary mitigation consideration in addition to the already described reduction in brilliance due to elevation angle, is taken from Reference D which states:

'If the horizontal meteorological visibility in all directions from every wind turbine generator in a group is more than 5 km, the intensity for the light positioned as close as practicable to the top of the fixed structure required to be fitted to any generator in the windfarm and displayed may be reduced to not less than 10% of the minimum peak intensity specified for a light of this type'.

33. It is therefore possible to take advantage of the CAA SARG Policy Statement dated 01/06/2017 and incorporate the option to reduce the hub height lighting to not less than 10% of the minimum peak intensity specified for the installation in good weather. In essence, reducing the 2000cd obstruction lights to 200cd in meteorological visibilities greater than 5km. Note: This concession is not applicable to MOD specification IR lighting, which is covered separately.

34. It will be necessary to calculate how much time the lights would spend at 2000cd and at 200cd. To assess historical visibility in this Mid Wales region, the closest meteorological stations to Aberedw are at Birmingham Airport and Cardiff Airport. Note: there are no meteorological stations that publish meaningful historical data closer to Aberedw. However, although the visibility at these airports will not be identical to Aberedw they will invariably be in the same air-mass for the majority of the time and will give similar observations over the longer period.

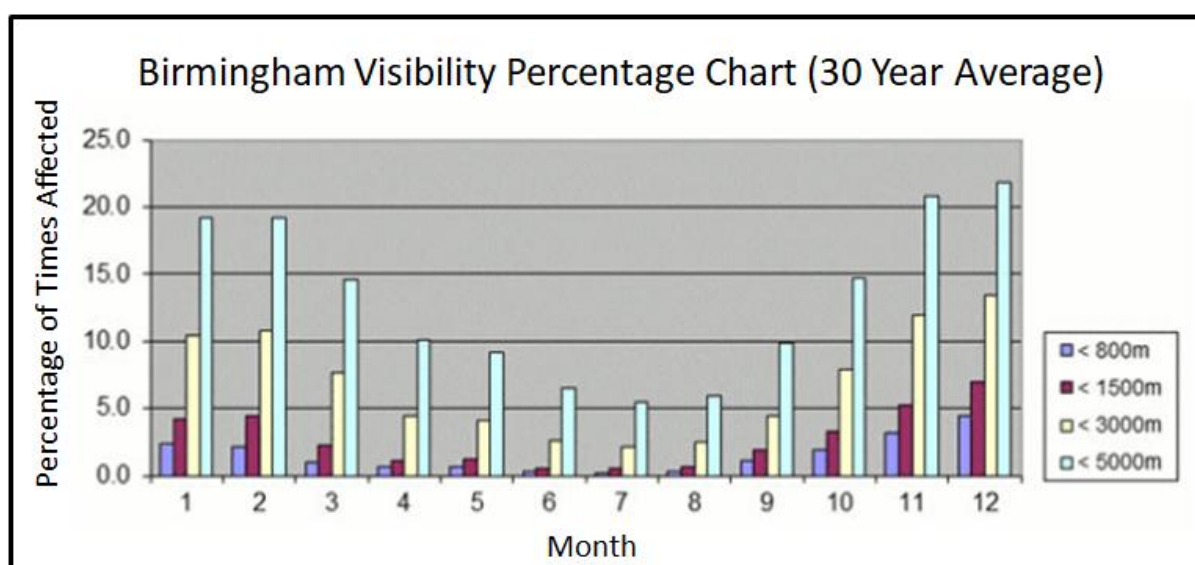


Table 9 Birmingham Visibility

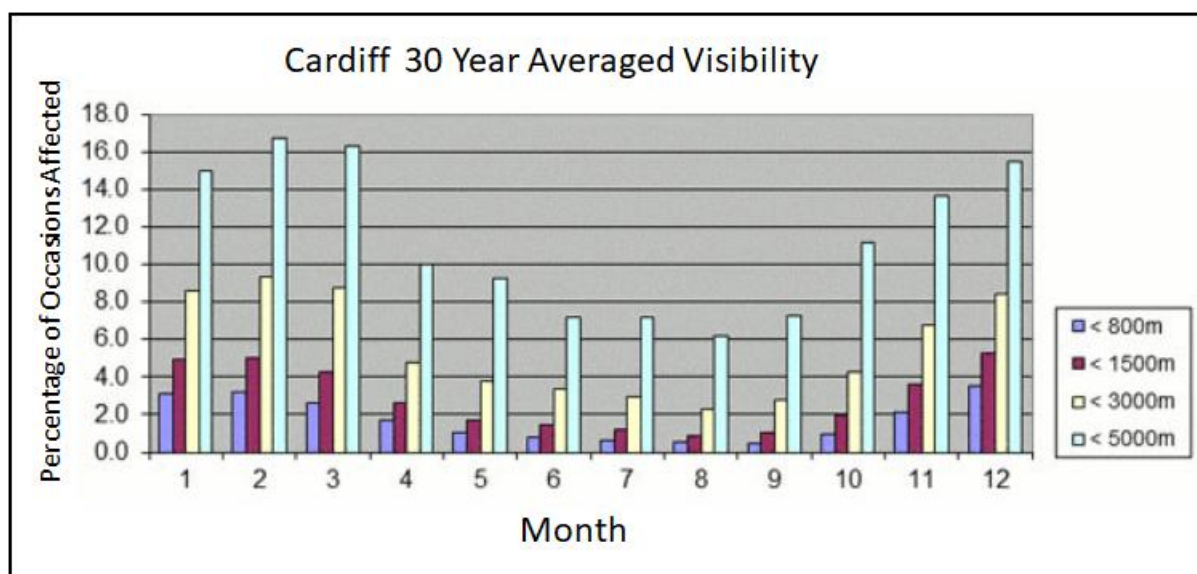


Table 10 Cardiff Visibility Table

35. These two Met Office tables show that the visibility is below 5km (light blue bar) for an average of 12% of the time at both Birmingham and Cardiff. This suggests that the Aberedw turbine lights will be at **2000cd for 12% of the time and 200cd for 88% of the time.**

36. In addition, visibility improves with height since the concentration of particles (dust, haze) and liquid droplets (water) reduces with height and the air also becomes thinner. It could be argued that the Aberedw visibility, on a 400m hill, will be better than that at Birmingham or Cardiff.

Obstruction Light Weather Obscuration.

37. On occasion, the visibility in the area of Aberedw will reduce significantly due to the presence of cloud on the hills. If the Aberedw turbines are in cloud, then the obstruction lights will not be seen. The turbines will carry the CAA/ANO lights on the turbine hub. The average height at the base of these turbines is around 1200-1400ft above mean sea level (amsl). The hub heights, for the proposed turbines will be around 400ft above ground level (agl) giving hub heights averaging around 1600-1800ft amsl. For aeronautical reasons, meteorological cloud bases are quoted in feet (ft).

38. It is now possible to compare the average **turbine hub/light** height of **1600-1800ft amsl** with the actual cloud bases recorded by the Met Office at Birmingham and Cardiff Airports, again, over a 30-year period as shown in Tables 11 and 12.

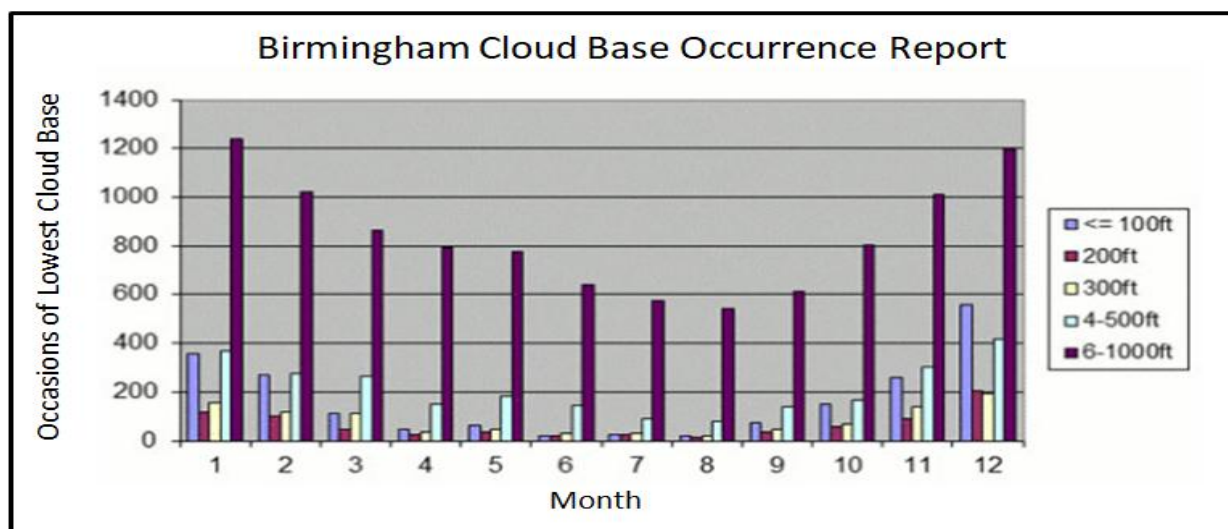


Table 11 Birmingham Cloud Base

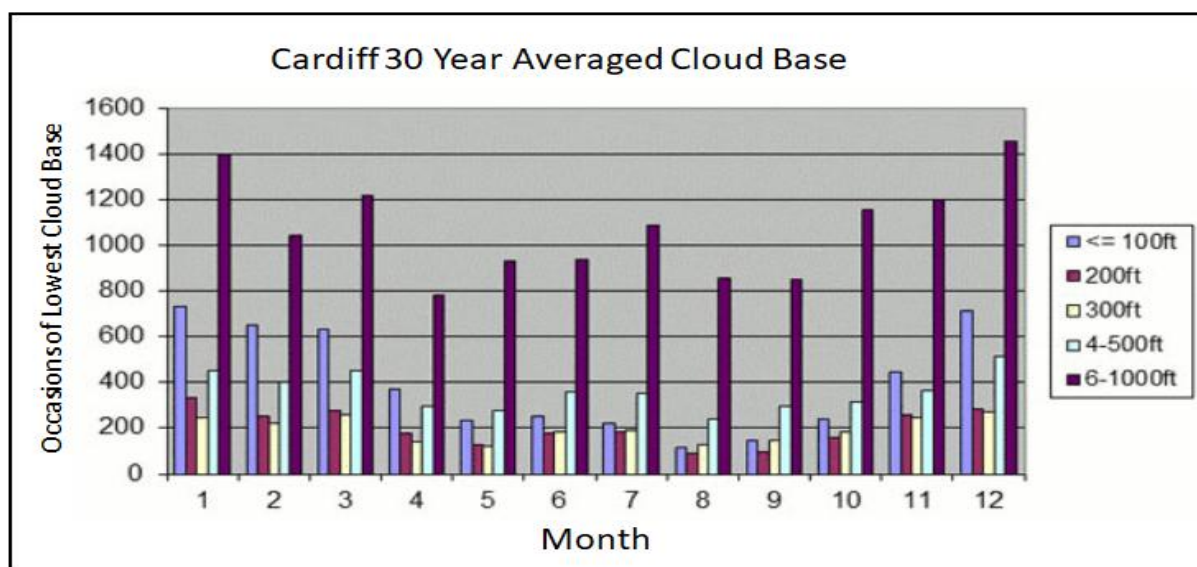


Table 12 Cardiff Cloud Base

39. The burgundy columns (600-1000ft) indicate that the cloud base will range from approximately 600-1200ft below turbine hub heights on around 1000 occasions a month. At this distance below the turbine hubs the lights will be completely obscured to the general public. The other columns (light blue in particular 400-500ft) indicate that on a further 300-500 or more occasions a month the lights will be completely obscured by cloud. Note: met office statistics report cloud base in occurrences as opposed to total duration.

40. Again, whilst Birmingham and Cardiff Airports are not at Aberedw, Met Office statistics show that the cloud-base reduces in the region of hills. It could be argued that at Aberedw, the cloud-base would be lower than at Birmingham and Cardiff thus providing even greater degree of obstruction light obscuration than calculated here.

Weather Obscuration Conclusion

41. It is most important not to try and combine the two different observations, visibility and cloud-base, into a single statement. Informal advice direct from Met Office and Airport forecasters indicates that the information for Aberedw, so gathered, should be presented as follows:

Meteorological observations suggest that the turbine hubs will be obscured on more than a thousand occasions a month by cloud. (Obstruction lights not visible to the public)

When not obscured by cloud, the visibility in the area of the turbines can be expected to exceed 5km for up to 88% of the time. (Obstruction lights switched down to 200cd)

Conclusion/Notes

42. The purpose of this Lighting Brief is to identify an obstruction lighting arrangement that will have the minimum effect upon the environment but at the same time is a safe design for night low level operators. This has been accomplished by using a combination of CAA ANO and MOD IR lights.

43. Applying the CAP 764 Draft criteria for visible red obstruction lighting results in a lighting solution that requires nine turbines to carry a visible red ANO light. By applying current CAA dispensations, and then matching the lighting to the operators that will require night visible lighting, minimal but aviation safe layout was achieved. This results in a total of:

6 x ANO Red 2000/200cd lights and 18 x MOD IR 600mW/sr lights.

44. Furthermore, the site is in an area where it will benefit from 90% light-dimming in good-weather and obscuration of both turbines and the visible ANO lighting in poor weather. This lighting layout was sent to the CAA for approval. They have responded with their lighting dispensation approval letter attached at Appendix C..

The lights will be regularly obscured by cloud and when not obscured set at the lower 200cd for approximately 88% of the time.

45. The CAA currently state: *met visibility should be measured at suitable points around the Energy Park.* In the case of the Aberedw turbines: Visibility Meters on **T2, T6, T7, T16 and T18** will meet this criterion.

Technical Mitigation

46. One other form of potential mitigation commonly discussed is the installation of an Aircraft Detection Lighting System (ADLS). There are two possible methods of detecting an aircraft approaching a wind farm that will automatically turn on the aviation obstruction lights, firstly through the use of a suitable primary surveillance radar (PSR) or secondly, the use of aircraft installed Electronic Conspicuity (EC) equipment with a suitable receiver at the wind farm. There are some significant technical and regulatory issues to be overcome before any such system can be installed and operated in the UK.

47. In the case of PSR, this is already in use at wind farms in Europe; as an example the Terma Scanter 5002 radar is installed at a number of sites as shown in Figure 10. The main regulatory constraint is that although such systems are in use in Europe, in the UK, where airspace tends to be shared to a much greater extent between users, the CAA have yet to mandate the performance parameters that such a system must be capable of fulfilling. For example, the coverage requirement will need to be defined in terms of maximum range of detection and activation (which may vary depending upon the speed of the aircraft), base of cover (above ground level) and almost certainly a maximum height coverage to avoid unnecessary activations, which a PSR on its own cannot ascertain. An initial set of draft requirements was promulgated in 2018 but these were for discussion with aviation stakeholders and the wind industry and it cannot be assumed that these are going to be the final criteria. Even if the standards are defined, it may be that any single radar will not be capable of delivering the required coverage where, for example, a wind farm is located on a hill and aircraft may approach below the wind farm from any direction. It may then become necessary to install multiple radars in order to achieve the required coverage at low level. This in itself may lead to limitations due to mutual interference in what is already a crowded part of the electro-magnetic spectrum, (although the Terma radar does have some anti-interference capabilities) but the additional radars may affect other systems working in the same frequency band. There would also be additional planning issues to consider, such as the visual impact of additional aerals, and rotating arrays. Technical constraints also mean that it will be necessary to position the radars some distance outside the windfarm as shown in the example below in order to avoid turbines screening the radar and to provide the required height coverage.



Figure 10 Terma 5002 Radar at a Wind Farm in Germany

48. The one major advantage of PSR is that it will detect any aircraft, both those transponding and those that are not, known as non-co-operative targets. Depending upon how the regulatory process

moves forwards, this may have a major effect on which systems to use for ADLS. In response to a recent planning inquiry paper the CAA responded stating in a letter dated 21 April 2021: *For the UK, there are some challenges to be resolved. The cost/benefit of the use of primary surveillance radar for the active detection of aircraft, spectrum availability, incentive pricing cost and geographical separation required before frequencies can be re-used potentially makes this a less than optimal solution.*

49. The alternate system is one based upon a reliance on aircraft carried Electronic Conspicuity (EC) transponders. Currently light aircraft flying clear of regulated airspace in the UK below 10,000ft are not required to carry a transponder (one example being Secondary Surveillance Radar or SSR). Most aircraft do, but not all. The CAA has been encouraging fitment by all aircraft and hope to have a regulatory system in place within the next few years requiring all flying machines to be fitted. Unfortunately this is not a simple process. This issue has been running for at least 20 years so far, however some limited progress is now being made. In the same response to a recent planning inquiry paper the CAA stated: *'At the same time, the lack of interoperability between the wide variety of electronic conspicuity devices currently available may require careful consideration of the specification of any passive system receivers and how they are deemed compliant to be deployed and operated.'* The letter goes on to state: *'We concur that not every situation may require ADLS to be fitted and operated; Article 222 or 223 requirements of the Air Navigation Order will remain, and the CAA may agree a specific solution under Section 7 of Article 222 and Section 11 of Article 223. However, ADLS could potentially provide an acceptable means of compliance that could provide greater certainty for developers when developing planning proposals on CAA acceptance and assist with discussions with communities during planning consultation.'* What this letter is saying is that ADLS using EC is technically feasible but that until the regulatory actions concerning the mandatory carriage of a compatible EC system have been completed and signed into law, and the coverage requirements agreed, uncertainty remains unless a planning condition to require the retrospective installation of a system is considered appropriate. The length of time that this is likely to take is difficult to estimate, however, realistically it is likely to be within a two to five year timeframe as it is a small part of a much wider airspace modernisation programme currently under way. Additionally, the CAA also issued a Guidance Notice dated 26/10/21 entitled: *'Electronic continuity specifications: enabling interoperability between airspace users'*. This announced the establishment of a task force to jointly develop electronic conspicuity specifications to enable interoperability between airspace users. It goes on to state: *'The adoption of EC specifications will not be mandated UK wide. Users of other systems can continue to benefit from the functionality that those products offer'*. This does not mean that an EC triggered ADLS system will not be feasible, but the regulatory challenges mentioned above may take longer to resolve, a position reinforced by the Scottish Government recently in relation to the Narachan Wind Farm decision where Ministers stated the following: *'The Scottish Ministers have carefully considered the option of imposing a suspensive condition to secure the installation of an ADLS, prior to construction of the proposed Development, but do not find that the evidence provided to date on the matter affords sufficient assurance that either method would be capable of being installed on the proposed Development within the next 5 years. As such, taking account of the resulting uncertainty on timescales for the deployment of the proposed Development if it were to be consented, the Scottish Ministers consider it would not be appropriate in this case to impose the suspensive condition proposed by the Reporter to mitigate the effects of the proposed Development's lighting on the SQs of the North Arran NSA.'* Clearly this decision was in Scotland but the same principle could apply equally in Wales.

50. What is clear is that when ADLS is finally mandated by the CAA, the carriage of compatible transponders is also mandated and all aircraft fitted with them, this is likely to be a realistic way of triggering an ADLS system. Such systems are passive at the wind farm and will not, therefore cause any interference. As shown in Figure 11 they require unobtrusive small aerials, approximately 1.2 metres long that are very reliable and relatively inexpensive to install and operate.

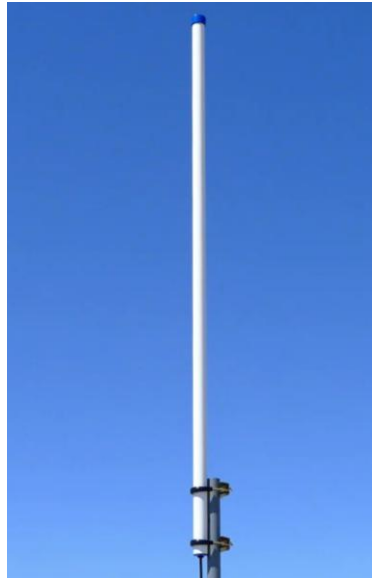


Figure 11 ADSB/SSR Passive Aerial

51. Bearing the above in mind, it might be prudent to ensure that lighting installed on the turbines is compatible with any future EC triggered ADSL system, so that when the regulatory process and aircraft equipage has been completed, it will be a relatively cheap and simple exercise to retro-fit such a system. Alternately, the ADSB/SSR aerials and system could be installed when the wind farm is constructed, ready for activation when required. Unfortunately, it is still not certain that the regulatory process and equipage issues will be completed within the lifetime of a planning consent.

52. An ADLS system may not be suitable for every location, depending upon the nature of aviation operations at night in the area around the wind farm and the activation criteria that are finally mandated by the CAA. If located close to the approach for a major airport for example, the lights might be required to be turning on and off continuously but this is very unlikely to be the case at Aberedw. The EC activated ADLS system will be able to differentiate between civil traffic and SAR/HEMS/military traffic using NVD and not therefore activate when these types of aviation operations are taking place within the activation zone for the system. The infra-red lights that these types of operations rely on will always be on at night, but of course are invisible to the naked eye and will have no effect on the visual impact of the development.

Comment

53. In recent months various briefing documents have been in circulation suggesting that visible obstruction lights are not required in the current aviation environment. The CAA have briefed WPAC that they do not support this position and would consider prosecuting organisations that do not follow the existing guidance and regulations. However, change will come; this will be led by the CAA and be centred on the new draft CAP 764 (as adhered to in this report) and the future development of ADLS.

54. From the direct experience of WPAC staff who have over 40 years of day/night low flying over land and sea both with and without NVG/Ds, the inclusion of adequate visible red lighting is important to cater for both routine operations and the inevitable unplanned outcome. Pilots uncertain of their location together with emergency situations and system failures of critical night low flying equipment are circumstances that require a degree of visible obstruction lighting on large wind turbines.

55. In addition, future green energy aircraft (hydrogen/electric and battery powered) will fly considerably lower and slower than current aircraft and will be significantly limited in track variation by much shorter ranges. Good visible obstruction lighting will become more, not less important in this low direct flight environment.

56. Finally, an aircraft colliding with a wind turbine is thankfully an extremely rare event but one with enormous potential consequences. A standard risk assessment as part of an aviation safety case would conclude that even a very low probability of a significant dangerous event is still unacceptable and must be mitigated, in this case by the fitting of visible obstruction lights.

Conclusion

57. This report has assessed the requirements for both visible, CAA approved aviation lighting and MOD approved Infra-Red lighting for the Aberedw Energy Park. The resulting layout is set out in Figures 4 and 6 and makes use of both CAA/ANO Red lights and MOD IR lights. The proposed layouts were sent to the CAA and MOD DIO for approval. The MOD will approve the IR lighting layout as there is no concession required and the CAA have considered the proposal and responded, their concession letter agreeing to the proposed layout is attached at Appendix C.


58. The report also provides the brilliance of lights that will be visible taking into account the elevation angle between the turbine hub obstruction light and the viewpoints and the distance between each turbine and each viewpoint. The report shows that for up to 88% of the time, the lights will only be required to operate at 10% luminous intensity, which will significantly reduce obstruction light effects in the area. Further interpretation of these results can be undertaken by a Landscape and Visual Impact Assessment expert.

59. The report then identifies additional mitigation options that, should the regulatory process allow, enable the visible medium intensity turbine lights to be switched off for the vast majority of the time and activated only on those occasions when an aircraft activates the system.

Authors

Cdr John Taylor RN (Ret) – after a career in the Royal Navy specialising in Air Traffic Control (ATC), Airspace Management and Air Defence which culminated in leading both the ATC and Fighter Control Specialisations, John worked for Lockheed Martin UK for three years as a Principal Consultant and Business Area Manager responsible for Air Traffic Management Consultancy, including the provision of advice to wind farm developers. In 2008 he founded WPAC Ltd and since then he and his team have provided aviation advice in relation to over 2000 wind farm and wind turbine sites, given evidence at a number of planning inquiries and enabled many sites to overcome aviation objections where it was feasible to do so. He and his team have also provided advice to a number of Local Planning Authorities, Renewable UK and the Aviation Fund Management Board, including organising workshops and the provision of guidance documents. John also advises planners and developers in relation to physical and technical safeguarding of non-wind farm developments in the vicinity of aviation facilities.

Sqn Ldr Mike Hale RAF (Rtd) has over 45 years, piloting, instructing and examining experience on numerous military fast jet aircraft through to a range of civilian and military general aviation training aircraft and gliders. He has held many posts including Flying Instructor, Training Officer, Flight Commander, Squadron Commander and Principal Tornado AD Force Examiner. He has amassed over 10,000 flying hours of experience when operating at many locations around the world. In parallel to his flying duties, Mike held the post of Officer Commanding the MOD Low Flying Operations Squadron (OC LFOS). In this post he was both Low Level Airspace Manager for the MOD & Wind-Farm Subject Matter Expert for the Defence Infrastructure Organization (DIO). During that period, he assessed over 14,000 wind-farm pre-applications and 2000 full applications against low flying, weapons range, specialist airspace, local community and aerodrome safeguarding criteria. Mike also instigated two Qinetiq ground based Infra Red obstruction lighting trials. These were followed by instigating and managing the MOD Infra Red/Low Intensity (Henlow) flight trials and the CAA/MOD/Trinity-House/RUK off-shore IR/Morse (North Hoyle) flight trials. In conjunction, Mike organised numerous and various supporting trials including night vision equipment compatibility and detailed lighting beam overspill analysis (where light is emitted outside the required specification envelope). In 2012, he was awarded an MBE for generating a proactive and mutually successful working relationship between the Wind Power Industry and the MOD Air Staff.



Cdr John Taylor RN (Ret)
Managing Director
Wind Power Aviation Consultants Ltd
www.wpac.co.uk



Sqn Ldr Mike Hale MBE MSc CFS RAF (Retd)
Aviation Consultant for WPAC Ltd



Wind Power Aviation Consultants Ltd

Aberedw Energy Park Aviation Lighting and Mitigation Technical Appendix V3.0

Our Ref: WPAC/024/25

Date: 23/04/25

Appendix A Lighting Results Tables

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux10-6) at 10%	Obscured
2	4.18	-2.9	218	22	12.4	1.2	X
6	3.85	-2.1	378	38	25.5	2.5	X
7	3.04	-4.0	133	13	14.4	1.4	X
10	2.3	-4.7	104	10	19.6	2.0	X
16	1.47	-9.0	58	6	26.8	2.7	X
18							

Viewpoint 1 St. David's Church, Cregrina

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux10-6) at 10%	Obscured
2	3.47	-3.7	149	15	12.4	1.2	X
6	2.05	-8.6	75	8	17.9	1.8	
7	3.91	-2.2	350	35	22.9	2.3	X
10	2.4	-7.6	75	8	13.0	1.3	
16	2.1	-7.9	75	8	16.9	1.7	
18	2.94	-6.1	74	7	8.6	0.9	

Viewpoint 2 A481 at Matts Common

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux10-6) at 10%	Obscured
2	4.88	-4.2	122	12	5.1	0.5	
6	3.76	-4.8	100	10	7.0	0.7	
7	4.57	-2.0	409	41	19.6	2.0	X
10	3.09	-6.1	74	7	7.8	0.8	
16	1.68	-10.1	75	8	26.5	2.6	
18	2.48	-7.4	75	8	12.2	1.2	

Viewpoint 3 A481 at Hundred House

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux10-6) at 10%	Obscured
2	2.14	-11.6	75	8	16.4	1.6	
6	2.46	-9.2	75	8	12.4	1.2	
7	3.8	-2.2	378	38	26.2	2.6	X
10	3.84	-3.7	149	15	10.1	1.0	X
16	5.12	-2.0	409	41	15.6	1.6	X
18	5.28	-2.0	409	41	14.6	1.5	X

Viewpoint 4 A470 at Aberduhonw



Wind Power Aviation Consultants Ltd

Aberedw Energy Park Aviation Lighting and Mitigation Technical Appendix V3.0

Our Ref: WPAC/024/25

Date: 23/04/25

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux ¹⁰⁻⁶) at 10%	Obscured
2	5.22	-3.3	176	18	6.4	0.6	
6	4.94	-2.1	378	38	15.5	1.6	X
7	3.94	-3.3	176	18	11.3	1.1	
10	3.37	-4.6	108	11	9.5	1.0	
16	2.46	-5.6	83	8	13.7	1.4	
18	1.94	-7.7	75	8	20.0	2.0	

Viewpoint 5 NCN 825 near Cregrina

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux ¹⁰⁻⁶) at 10%	Obscured
2	4.34	-3.8	140	14	7.4	0.7	
6	2.93	-4.8	100	10	11.6	1.2	
7	4.67	-2.6	262	26	12.0	1.2	M
10	3.12	-4.7	104	10	10.6	1.1	
16	2.42	-5.4	87	9	14.8	1.5	
18	3.34	-4.3	117	12	10.5	1.1	

Viewpoint 6 Perthi Common

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux ¹⁰⁻⁶) at 10%	Obscured
2	3.81	-1.9	448	45	30.8	3.1	
6	5.04	-1.0	1055	106	41.5	4.2	
7	2.64	-1.4	776	78	111.1	11.1	
10	4.16	-1.4	706	71	40.7	4.1	
16	5.26	-0.8	1314	131	47.4	4.7	
18	4.49	-1.2	858	86	42.6	4.3	

Viewpoint 7 Twm Tobacco's Grave on Llandeilo Hill

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux ¹⁰⁻⁶) at 10%	Obscured
2	4.08	-1.9	448	45	26.9	2.7	
6	2.84	-2.0	448	45	55.4	5.5	
7	5.34	-0.8	1314	131	46.1	4.6	
10	4.26	-1.5	642	64	35.3	3.5	
16	4.6	-1.0	1055	106	49.8	5.0	
18	5.3	-1.1	949	95	33.7	3.4	

Viewpoint 8 Carneddau



Wind Power Aviation Consultants Ltd

Aberedw Energy Park Aviation Lighting and Mitigation Technical Appendix V3.0

Our Ref: WPAC/024/25

Date: 23/04/25

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux ¹⁰⁻⁶) at 10%	Obscured
2	3.18	-5.3	89	9	8.8	0.9	
6	3.42	-4.2	122	12	10.4	1.0	
7	4.83	-2.3	324	32	13.9	1.4	X
10	4.88	-3.2	196	20	8.2	0.8	
16	6.11	-1.8	488	49	13.1	1.3	X
18	6.32	-2.1	378	38	9.5	1.0	X

Viewpoint 9 Garth Hill

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux ¹⁰⁻⁶) at 10%	Obscured
2	5.27	-3.6	154	15	5.6	0.6	
6	5.65	-2.9	218	22	6.8	0.7	
7	3.62	-4.1	128	13	9.8	1.0	
10	4.05	-4.2	122	12	7.4	0.7	
16	4.02	-3.9	136	14	8.4	0.8	
18	3.12	-5.4	87	9	8.9	0.9	

Viewpoint 10 Rhulen, south east of Aberedw

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux ¹⁰⁻⁶) at 10%	Obscured
2	5.74	-1.9	448	45	13.6	1.4	
6	4.26	-2.0	409	41	22.5	2.3	
7	6.29	-1.2	858	86	21.7	2.2	
10	4.77	-2.0	409	41	18.0	1.8	
16	4.09	-1.9	448	45	26.8	2.7	
18	5.01	-1.8	488	49	19.4	1.9	

Viewpoint 11 Castle Bank

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux ¹⁰⁻⁶) at 10%	Obscured
2	4.35	-5.8	78	8	4.1	0.4	
6	4.32	-5.3	89	9	4.8	0.5	
7	6.02	-2.1	378	38	10.4	1.0	X
10	5.88	-3.8	140	14	4.1	0.4	X
16	6.98	-1.5	642	64	13.2	1.3	X
18	7.31	-2.0	409	41	7.7	0.8	X

Viewpoint 12 Wye Bridge, Builth Wells



Wind Power Aviation Consultants Ltd

Aberedw Energy Park Aviation Lighting and Mitigation Technical Appendix V3.0

Our Ref: WPAC/024/25

Date: 23/04/25

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10 ⁻⁶)	Microlumens per square metre (lux10 ⁻⁶) at 10%	Obscured
2	7.06	-2.8	232	23	4.7	0.5	
6	5.77	-3.0	206	21	6.2	0.6	
7	6.92	-2.0	409	41	8.5	0.9	X
10	5.41	-3.3	176	18	6.0	0.6	
16	4.05	-4.0	133	13	8.1	0.8	
18	4.82	-3.6	154	15	6.6	0.7	

Viewpoint 13 Unnamed lane at Bettws

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10 ⁻⁶)	Microlumens per square metre (lux10 ⁻⁶) at 10%	Obscured
2	6.15	-1.2	858	86	22.7	2.3	
6	6.68	-0.8	1314	131	29.5	3.0	
7	4.48	-0.8	1314	131	65.4	6.5	
10	5.12	-1.1	949	95	36.3	3.6	
16	5.15	-0.8	1314	131	49.5	5.0	
18	4.25	-1.3	776	78	42.9	4.3	

Viewpoint 14 Unnamed lane, north-east of Llanbedr Hill

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10 ⁻⁶)	Microlumens per square metre (lux10 ⁻⁶) at 10%	Obscured
2	4.64	-5.4	87	9	4.0	0.4	
6	4.45	-5.1	92	9	4.7	0.5	
7	6.31	-1.8	488	49	12.3	1.2	X
10	6.06	-3.6	154	15	4.2	0.4	X
16	7.08	-1.7	535	54	10.7	1.1	X
18	7.46	-1.9	488	49	8.8	0.9	X

Viewpoint 15 Royal Welsh Showground

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10 ⁻⁶)	Microlumens per square metre (lux10 ⁻⁶) at 10%	Obscured
2	4.97	-2.0	448	45	18.1	1.8	
6	6.28	-1.2	858	86	21.7	2.2	
7	5.68	-1.1	1055	106	32.8	3.3	
10	6.83	-1.2	858	86	18.4	1.8	
16	8.34	-0.8	1314	131	18.9	1.9	
18	8.03	-1.0	1055	106	16.4	1.6	

Viewpoint 16 Wye Valley Walk near Banc y Celyn



Wind Power Aviation Consultants Ltd

Aberedw Energy Park Aviation Lighting and Mitigation Technical Appendix V3.0

Our Ref: WPAC/024/25

Date: 23/04/25

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux10-6) at 10%	Obscured
2	6.98	-3.0	206	21	4.2	0.4	
6	6.72	-2.8	232	23	5.2	0.5	
7	8.65	-1.8	488	49	6.5	0.7	X
10	8.35	-2.3	324	32	4.7	0.5	
16	9.26	-1.9	448	45	5.2	0.5	
18	9.71	-1.7	535	54	5.7	0.6	X

Viewpoint 17 NCN 8 near Cilmerly

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux10-6) at 10%	Obscured
2	11.24	-0.3	1867	187	14.8	1.5	M
6	10.68	-0.1	1984	198	17.4	1.7	
7	10.03	0.0	2028	203	20.2	2.0	M
10	9.3	-0.2	1934	193	22.4	2.2	M
16	7.99	0.0	2028	203	31.8	3.2	
18	7.87	-0.2	1934	193	31.2	3.1	M

Viewpoint 18 Llanfihangel Hill

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux10-6) at 10%	Obscured
2	9.25	-1.0	1055	106	12.3	1.2	
6	10.29	-0.6	1580	158	14.9	1.5	
7	7.8	-0.6	1580	158	26.0	2.6	M
10	9.02	-0.8	1314	131	16.2	1.6	
16	9.52	-0.6	1580	158	17.4	1.7	
18	8.6	-0.8	1314	131	17.8	1.8	

Viewpoint 19 The Begwns Roundabout

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux10-6) at 10%	Obscured
2	11.56	-0.9	1181	118	8.8	0.9	
6	10.47	-0.8	1314	131	12.0	1.2	
7	10.95	-0.6	1580	158	13.2	1.3	
10	9.66	-0.9	1181	118	12.6	1.3	
16	8.15	-0.9	1181	118	17.8	1.8	
18	8.57	-1.0	1055	106	14.4	1.4	

Viewpoint 20 Bridleway off A44 near Castell Crugerydd



Wind Power Aviation Consultants Ltd

Aberedw Energy Park Aviation Lighting and Mitigation Technical Appendix V3.0

Our Ref: WPAC/024/25

Date: 23/04/25

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10 ⁻⁶)	Microlumens per square metre (lux ^{10⁻⁶}) at 10%	Obscured
2	8.76	-1.3	776	78	10.1	1.0	
6	9.16	-1.0	1055	106	12.6	1.3	
7	10.3	-0.8	1314	131	12.4	1.2	
10	10.59	-1.0	1055	106	9.4	0.9	
16	11.85	-0.7	1451	145	10.3	1.0	
18	12.04	-0.8	1314	131	9.1	0.9	

Viewpoint 21 Heart of Wales Line Trail at Moelfre

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10 ⁻⁶)	Microlumens per square metre (lux ^{10⁻⁶}) at 10%	Obscured
2	12.27	-0.7	1451	145	9.6	1.0	
6	10.92	-0.5	1697	170	14.2	1.4	
7	12.15	-0.4	1790	179	12.1	1.2	
10	10.64	-0.6	1580	158	14.0	1.4	
16	9.25	-0.5	1697	170	19.8	2.0	
18	9.95	-0.6	1580	158	16.0	1.6	

Viewpoint 22 Llandeigley Rocks

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10 ⁻⁶)	Microlumens per square metre (lux ^{10⁻⁶}) at 10%	Obscured
2	13.15	-0.5	1697	170	9.8	1.0	
6	12.19	-0.3	1867	187	12.6	1.3	
7	12.34	-0.2	1934	193	12.7	1.3	M
10	11.2	-0.4	1790	179	14.3	1.4	
16	9.69	-0.3	1867	187	19.9	2.0	
18	9.96	-0.4	1790	179	18.1	1.8	M

Viewpoint 23 Open access land on Mynd

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10 ⁻⁶)	Microlumens per square metre (lux ^{10⁻⁶}) at 10%	Obscured
2	12.52	-1.5	642	64	4.1	0.4	X
6	11.12	-1.6	584	58	4.7	0.5	
7	13.5	-1.3	776	78	4.3	0.4	
10	12.09	-1.6	584	58	4.0	0.4	
16	11.56	-1.3	776	78	5.8	0.6	X
18	12.48	-1.4	706	71	4.5	0.5	X

Viewpoint 24 A4081 at Llanyre



Wind Power Aviation Consultants Ltd

Aberedw Energy Park Aviation Lighting and Mitigation Technical Appendix V3.0

Our Ref: WPAC/024/25

Date: 23/04/25

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux10-6) at 10%	Obscured
2	12.66	-0.6	1697	170	10.6	1.1	
6	13.17	-0.4	1790	179	10.3	1.0	
7	14.11	-0.2	1934	193	9.7	1.0	
10	14.55	-0.4	1790	179	8.5	0.9	
16	15.86	-0.3	1867	187	7.4	0.7	
18	15.99	-0.3	1867	187	7.3	0.7	

Viewpoint 25 Promoted viewpoint south of Cwm Graig-ddu

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux10-6) at 10%	Obscured
2	16.97	-0.9	1181	118	4.1	0.4	
6	15.53	-0.8	1314	131	5.5	0.5	X
7	17.11	-0.7	1451	145	5.0	0.5	
10	15.56	-0.9	1181	118	4.9	0.5	
16	14.28	-0.9	1181	118	5.8	0.6	
18	15.06	-0.9	1181	118	5.2	0.5	

Viewpoint 26 Elan Valley Way near Cwmwrach

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux10-6) at 10%	Obscured
2	21.11	0.2	2093	209	4.7	0.5	
6	22.11	0.3	2117	212	4.3	0.4	
7	19.63	0.4	2132	213	5.5	0.6	
10	20.74	0.3	2117	212	4.9	0.5	
16	21	0.3	2117	212	4.8	0.5	
18	20.09	0.3	2117	212	5.3	0.5	

Viewpoint 27 Hay Bluff, Bannau Brycheiniog National Park

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10-6)	Microlumens per square metre (lux10-6) at 10%	Obscured
2	27	-0.5	1790	179	2.5	0.3	
6	28.26	-0.4	1790	179	2.2	0.2	
7	27.55	-0.3	1867	187	2.5	0.3	
10	28.84	-0.4	1790	179	2.2	0.2	
16	30.34	-0.3	1867	187	2.0	0.2	
18	29.94	-0.4	1790	179	2.0	0.2	

Viewpoint 28 Cefn Llechid, Bannau Brycheiniog National Park



Wind Power Aviation Consultants Ltd

Aberedw Energy Park Aviation Lighting and Mitigation Technical Appendix V3.0

Our Ref: WPAC/024/25

Date: 23/04/25

Turbine	Distance (KM)	Elevation Angle	Candela	Candela at 10%	Microlumens per square metre (lux10 ⁻⁶)	Microlumens per square metre (lux10 ⁻⁶) at 10%	Obscured
2	29.78	0.5	2142	214	2.4	0.2	
6	31.21	0.5	2142	214	2.2	0.2	
7	29.82	0.6	2142	214	2.4	0.2	
10	31.32	0.5	2142	214	2.2	0.2	
16	32.73	0.5	2142	214	2.0	0.2	
18	32.1	0.5	2142	214	2.1	0.2	

Viewpoint 29 Pen y Fan, Bannau Brycheiniog National Park



Appendix B – Abbreviations and Definitions

ADSB.....	Automatic Dependent Surveillance Broadcast
AGL.....	Above Ground Level (Height)
ANO.....	Air Navigation Order
AMSL.....	Above Mean Sea Level (Elevation)
ASG.....	Aviation Steering Group
CAA.....	Civil Aviation Authority
CAP.....	Civil Aviation Publication (Referrers to Specific Documents)
cd.....	Candela, a measure of light intensity
DIO.....	Defence Infrastructure Organisation
HEMS.....	Helicopter Emergency Medical Services
HNTA.....	Helicopter Night Training Area
In Flight Visibility.....	The distance a pilot can see ahead to fly & navigate the aircraft
IR.....	Infra-Red
Kts.....	Knots: a measure of airspeed (10 kts = 12mph = 19 kph)
LED.....	Light Emitting Diode
MOD.....	Ministry of Defence
mW/sr.....	milliWatts per steradian: electromagnetic energy output related to solid angle
Nm.....	Nautical Mile
NVD	Night Vision Devices - Aircraft Mounted
NVG.....	Night Vision Goggles - Operator Worn
Radar Altimeter.....	An altimeter that uses radar to accurately measure height above ground
QFE	Setting on Altimeter that gives Height above Airfield
RoAR.....	Rules of the Air Regulations
Rule 5.....	The Low Flying Rule – part of RoAR
Rule 28.....	VFR Rules Outside Controlled Airspace – part of the RoAR
ReUK.....	Renewables UK – The UK Wind Industry Body
SAR Box.....	Night Training Area for Search and Rescue Helicopter Units
SSA.....	Sector Safety Altitude
SSR.....	Secondary Surveillance Radar
UKAB.....	United Kingdom Air Prox Board – Investigates Aircraft Near Misses
VFR.....	Visual Flight Rules (Flight without ATC on a see-and-be-seen basis)
VMC.....	Visual Meteorological Conditions (Weather suitable for VFR flight)

Appendix C CAA Response

OFFICIAL - Named Parties Only. This information is intended for Wind Power Aviation Consultants Ltd. only

Strategy and Policy Group Windfarm Policy



Mike Hale
Aviation Consultant
Wind Power Aviation Consultants Ltd.
38 Hadrian Way
Chilworth
Southampton
SO16 7HX

22 April 2025
Ref Windfarms / Aberwdw

Dear Mike,

Proposed Obstacle Lighting Scheme for Aberwdw Wind Farm

Reference: Aberwdw Wind Farm Lighting report dated 12 March 2025

1. Thank you for the lighting brief at reference. The report discusses the proposed obstacle lighting plan for the Aberwdw Wind Farm, located approximately 5 km to the east of Buih Wells.
2. The proposed Aberwdw Wind Farm consists of 18 turbines, with heights 200m ground to tip. This brings the turbines within scope of the Air Navigation Order (ANO) Article 222 obstacle lighting requirements.
3. We have considered the report carefully and take note of the intent to address concerns relating to adverse visual impacts of aviation lighting on non-aviation receptors while ensuring that the lighting installed on the turbines meets air safety requirements.
4. We note the proposed lighting scheme identifies the perimeter outline and that some mitigation is proposed to be provided by the provision of infra-red lighting for those operators who carry Night Vision Device capability.
5. Under provisions given in the Air Navigation Order (ANO) Article 222 section 6, the CAA provides for the following variation:
 - medium intensity steady red (2000 candela) lights on the nacelles of turbines T02, T06, T07, T10, T16 and T18;
 - a second 2000 candela light on the nacelles of the above turbines to act as alternates in the event of a failure of the main light (note that both lights should not be lit at the same time);

Civil Aviation Authority

2E Aviation House Beehive Ring Road Crawley West Sussex RH6 0YR www.caa.co.uk
Telephone 0330 138 3166 andy.wells@caa.co.uk

OFFICIAL - Named Parties Only



OFFICIAL - Named Parties Only. This information is intended for Wind Power Aviation Consultants Ltd. only

- the lights on these turbines to be capable of being dimmed to 10% of peak intensity when the lowest visibility as measured at suitable points around the wind farm by visibility measuring devices exceeds 5km;
- infra-red lights to MoD specification installed on the nacelles of turbines T01, T02, T03, T04, T05, T06, T07, T08, T09, T10, T11, T12, T13, T14, T15, T16, T17 and T18 (note that dimming permission is applicable only to visible lights, not infra-red lighting).

6. Intermediate level 32 candela lights are not required to be fitted on the turbine towers.

7. If the proposed design of the wind farm changes (other than variations due to micro-siting etc.) this is likely to require a revision to this aviation obstacle lighting variation.

Yours sincerely,



Andy Wells
Manager Aviation and Wind Turbine Policy

Continued (2 of 2 pages)

OFFICIAL - Named Parties Only

Appendix D CEL-WT-MIC Specification



Medium Intensity Red 2,000cd Light

230VAC - LED Aircraft Warning Light

CEL-WT-MIC - StandAlone / Modbus

Medium intensity stand-alone 2,000cd red model is designed for Wind Turbine Installations. This intelligent light offers unique features such as incorporated fault monitoring, photocell, GPS synchronisation, adjustable luminosity and supports both stand-alone and Modbus operation as a part of a larger CEL aviation light system network.

Key features

- 2,000cd (effective) RED fixed or flashing modes
- Extremely reliable - long lifetime
- Supports both stand-alone and Modbus operations
- Suitable for Offsh ore environment
- Incorporated GPS synchronisation
- Adjustable luminous output levels 10%, 30%, and 100%
- Incorporated photocell and fault monitoring
- WiFi interface
- Design lifetime more than 20 years
- 5yr warranty- the longest in the industry

Specifications met

- ICAO International Standards and Recommended Practices: Aerodromes Annex 14 Volume 1, 8th Edition, July 2018,
- Chapter 6: Medium-intensity, Type B/C Fixed Obstacle Light
- European Aviation Safety Agency - Chapter Q — Visual Aids for Denoting Obstacles CS-ADR-DSN.Q.848
- FAA Advisory Circular 150/534543F 09/12/06: L-864 and L-885
- CEL-WT-MIC - light measurement chart table - DEC2024

Optical characteristics

- 2,000cd (effective)
- Colour aviation RED
- NVG compliant infrared (850nm)
- Horizontal beam 360°
- Vertical beam 3°
- Maximum intensity at -1° is less than 1,110cd
- Maximum intensity at -10° is less than 56cd

Electrical characteristics

- Operating voltage 90-265VAC
- Constant power input at 95% by active PFC
- Flash rates: 20/30/40/60fpm
- Meets standards
- EMC (Emissions): EN 61000-6-4
- EMC (Immunity): EN 61000-6-2



Electrical characteristics - continued


- Power consumption
 - 17W @Night (RED, 40fpm)
 - 20W @Night (RED+IR, 40fpm)
 - 25W @Night (RED, fixed)
 - 30W @Night (RED+IR, fixed)
- Recommended cables (Outdoor):
 - Power (L-N-PE): 3x1,5mm² or 3x2,5mm²
 - Data: CAT 7
 - Alarm: CAT 7, 3x1,5mm² or 3x2,5mm²
 - Power + Data: 6x1,5mm² or 6x2,5mm²
- Input/Output terminals can be used to daisy chain power and data to additional lighthoods

Mechanical characteristics

Painted marine grade aluminium body (C5MHigh)
Glass cover
Degree of protection IP66
Operating temperature range -40...+55°C
Mounting 240x240mm
Height 333mm, diameter 270mm
Weight 11kg

Additional Factory-Installed Options

- Cold-climate version (CCV)
- NVG compliant infrared (IR)



Contarmex Europe Limited
252 Martin Way,
Morden, Surrey SM4 4AW
United Kingdom
T: +44 (0)20 8395 6006
E: info@contarmex.com
www.contarmex.com
www.aircraftwarninglights.co.uk



Page 1 of 2

Technical information in this document is subject to change without notice. Copyright© CEL2024 Dec 2024

www.contarmex.com


Medium Intensity Red 2,000cd Light

230VAC - LED Aircraft Warning Light

CEL-WT-MIC - StandAlone / Modbus

CEL-WT-MIC

Light unit with mounting dimensions

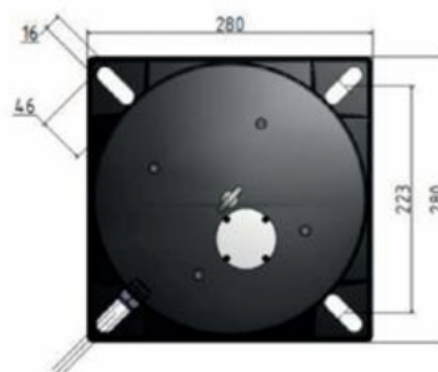

CEL-WT Versions

CEL-WT-MIB	Medium-intensity Type B (flashing) obstruction light, 2,000cd Red, GPS sync, Photocell, Alarm, 100-240VAC. Supports stand-alone and Modbus Network operation.
CEL-WT-MIC	Medium-intensity Type C (steady burn) obstruction light, 2,000cd Red, infrared, GPS sync, Photocell, Alarm, 100-240VAC. Supports stand-alone and Modbus Network operation.
CEL-WT-MIB-IR	Medium-intensity Type B (flashing) obstruction light, 2,000cd Red, Infrared 850nm, GPS sync, Photocell, Alarm, 100-240VAC. Supports stand-alone and Modbus Network operation.
CEL-WT-MIC-IR	Medium-intensity Type C (steady burn) obstruction light, 2,000cd Red, Infrared 850nm, GPS sync, Photocell, Alarm, 100-240VAC. Supports stand-alone and Modbus Network operation.

Contarnex Europe Limited, 252 Martin Way, Morden, Surrey SM4 4AW, UK
T: +44 (0)20 8395 6006 E: info@contarnex.com - W: contarnex.com - W: aircraftwarninglights.co.uk

Technical information in this document is subject to change without notice. Copyright© CEL2024 - Dec 2024.

CEL
AVIATION LIGHTING